


Technical drawing of a bridge deck cross-section. The total width is 600. The deck is supported by a central pier and two side piers. The central pier has a width of 19. The side piers have a width of 75. The deck thickness is 140. The reinforcement consists of a top layer of 19 bars and a bottom layer of 75 bars. The reinforcement is labeled as 補強材: C-60×60×3.2 (SS400). The drawing also shows the reinforcement layout for the side piers and the central pier.

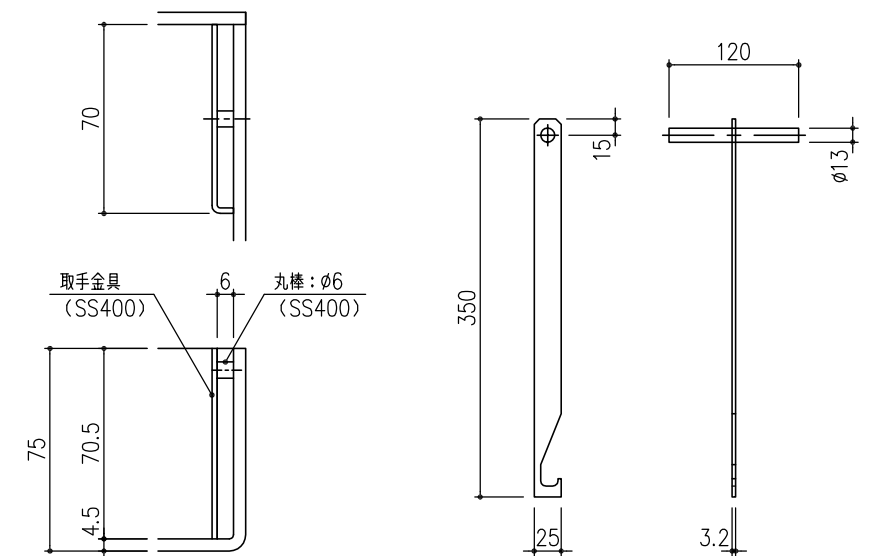

オプション：開閉フック（MF-62）
（S45C）電気亜鉛めっき

充填後質量：42.7 kg/枚

記号	内容	日付	編集	担当	製図	照査	承認	1 5	名称	DKC スチール製バウンダリー側溝排除口蓋 U字溝 (U-240) 用 T-14 (R5) 荷重 蓋 : GNSSL・GNSNSL10-U24-14 片寄せ 排除口 受枠 : SLSSG14-U24 片寄せ 排除口
					高橋	野林	金子			
				平成 年 月 日				三角 法	図 番	PG-E2-00625
親番 図歴				第一機材株式会社						