


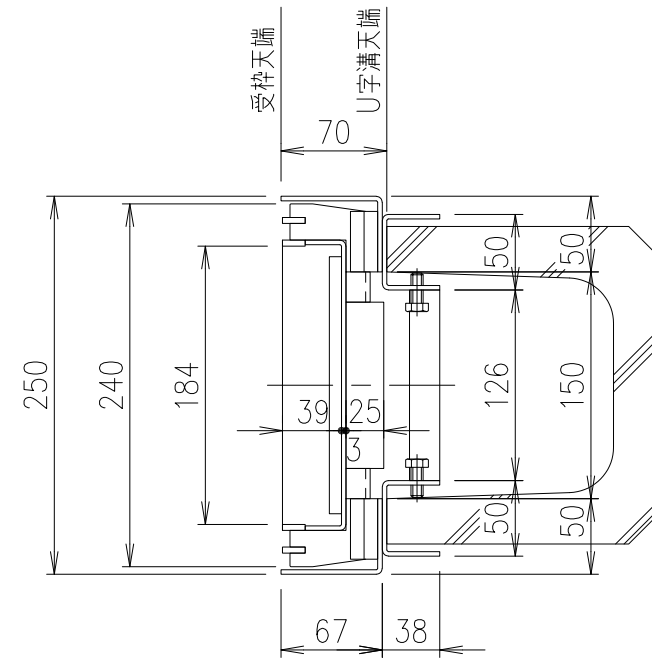

Technical drawing of a door assembly showing dimensions and components. The drawing includes the following labels and dimensions:

- 受枠 L-67×50×3 (SUS304)**: L-Bracket frame, 67x50x3 mm, SUS304.
- ゴムクッション (CR)**: Rubber cushion, CR.
- 幅止めスペーサー P.L-3.0 (SUS304) @900**: Width stop spacer, P.L-3.0, SUS304, @900.
- 六角ボルト M8×20 (SUS304)**: Hex bolt, M8x20, SUS304.

Dimensions (mm):

- Overall width: 150
- Overall height: 126
- Bracket height: 67
- Bracket width: 50
- Bracket thickness: 3
- Bracket width (inner): 4
- Bracket width (outer): 2
- Bracket width (inner): 11
- Bracket width (outer): 11
- Bracket width (inner): 31
- Bracket width (outer): 39
- Bracket width (inner): 25
- Bracket width (outer): 3
- Bracket width (inner): 15
- Bracket width (outer): 50
- Bracket width (inner): 50
- Bracket width (outer): 150

	受 枠			SUS304		質量：6.2kg/m組
	蓋			SUS304	6.2	
項番	名称			材質	個数 kg／個	記事
担当	製図	照査	承認	1 — 5 名 称	DKC	
	高橋	野林	本木		T-14荷重用・目地ピッチ15 LPSL15-25-14・U字溝150用受枠付	
年 月 日					尺度	
第一機材株式会社				三角法	図番	PJ-E3-02939A