
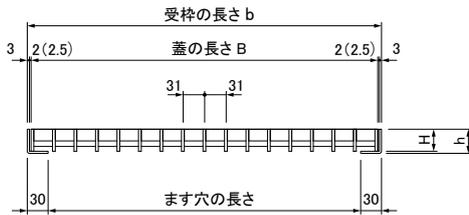
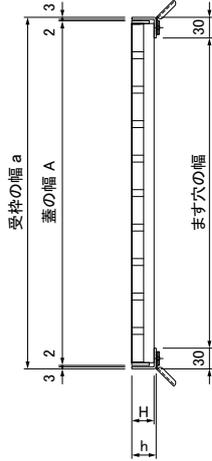


ステンレス(SUS304)製 ロンブスグレーチング ます蓋

ノンスリップタイプ

RHOSMN

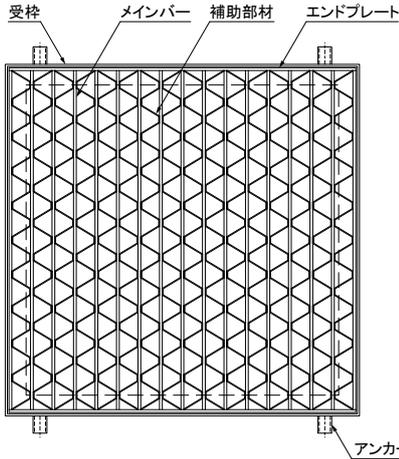


● **特長**

下水・雨水・汚水などの集排水用角ます蓋として最適。


● **備考**

ノンスリップタイプについてのご注意は4-1-3ページ
荷重区分の詳細は4-1-2ページ参照。

● **適用受枠**
LSM



● **スベリ止め詳細図**



4-4

ステンレス製 ロンブスグレーチング

● **寸法表** 横断衝撃なし

ます穴の 幅×長さ mm	ます蓋			四方受枠					適用荷重				
	A mm	B mm	H mm	型式	質量 kg/枚	型式	a mm	b mm	h mm	質量 kg/枚	歩道	T-2	T-14
300×300	350	350	15	RHOSMN1535	3.5	LSM-15	360	360	18	1.6	●		
			25	RHOSMN2535	5.0	LSM-25	360	360	28	1.8		●	
			38	RHOSMN3835	7.1	LSM-38	360	360	41	2.3			●
350×350	400	400	15	RHOSMN1540	4.3	LSM-15	410	410	18	1.9	●		
			32	RHOSMN3240	7.5	LSM-32	410	410	35	2.4		●	
			45	RHOSMN4540	10.1	LSM-45	410	410	48	3.0			●
400×400	450	450	15	RHOSMN1545	5.5	LSM-15	460	460	18	2.1	●		
			32	RHOSMN3245	9.6	LSM-32	460	460	35	2.7		●	
			50	RHOSMN5045	14.2	LSM-50	460	460	53	3.5			●
450×450	500	499	15	RHOSMN1550	6.6	LSM-15	510	510	18	2.3	●		
			32	RHOSMN3250	11.4	LSM-32	510	510	35	3.0		●	
			50	RHOSMN5050	16.8	LSM-50	510	510	53	3.8			●
500×500	550	550	15	RHOSMN1555	7.9	LSM-15	560	560	18	2.6	●		
			38	RHOSMN3855	16.0	LSM-38	560	560	41	3.6		●	
			60	RHOSMN6055	23.9	LSM-60	560	560	63	5.0			●
550×550	600	600	15	RHOSMN1560	9.6	LSM-15	610	610	18	2.8	●		
			38	RHOSMN3860	19.3	LSM-38	610	610	41	4.0		●	
600×600	650	650	15	RHOSMN1565	11.3	LSM-15	660	660	18	3.0	●		
			38	RHOSMN3865	22.8	LSM-38	660	660	41	4.3		●	