


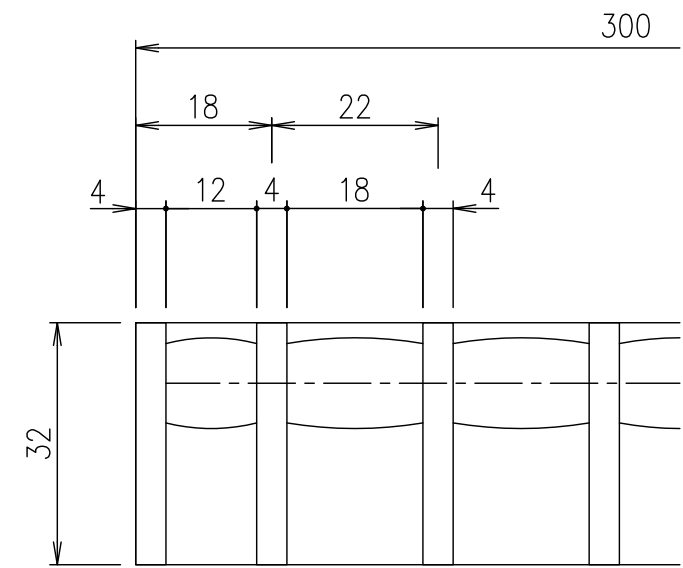

Technical drawing of a staircase railing section. The drawing shows a cross-section of the railing assembly. Key components and dimensions include:

- Top Rail:** Labeled $\square 310$ at the top right.
- Intermediate Rail:** Labeled $\square 300$ below the top rail.
- Bottom Rail:** Labeled $\square 250$ at the bottom right.
- Vertical Post:** Labeled $\square 310$ at the top right, indicating its diameter.
- Handrail:** Labeled $\square 300$ at the top right, indicating its diameter.
- Stainless Steel Grating:** Labeled "ステンレス製グレーチングますぶた FBM22-3230 メインバーピッチ $p=22$ (SUS304)".
- Support Beam:** Labeled "受枠LSM-32 (SUS304)".
- Anchor:** Labeled "アンカー (SEHC)".
- Dimensions:**
 - Vertical distance from the top of the support beam to the top of the railing: 35.
 - Vertical distance from the top of the support beam to the top of the grating: 32.
 - Horizontal distance from the vertical post to the right edge of the railing: 30.
 - Horizontal distance from the vertical post to the right edge of the support beam: 3.
 - Horizontal distance from the vertical post to the right edge of the grating: 2.

				受枠		SUS304		1.8		
				ステンレスますぶた		SUS304		5.1		
				項番	名称		材質	個数	kg/個	記事
記号	内容	日付	編集	担当	製図	照査	承認	1 5	名称	DKC ステンレス製グレーチングますぶた
					井上	本木	伊藤			尺度
				平成 年 月 日				三角 法	図番	
親番				第一機材株式会社						
図歴										