


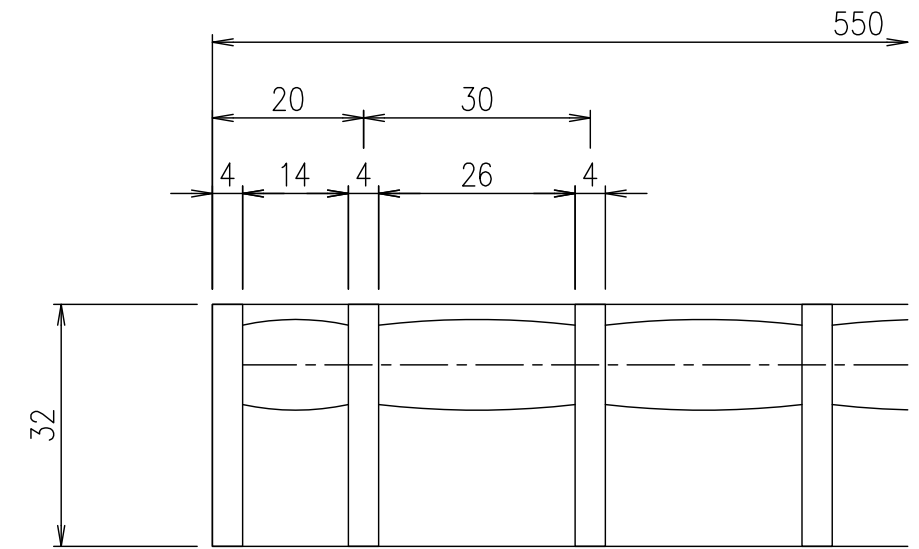

Technical drawing of a wall and floor connection detail. The drawing shows a cross-section of a wall and floor assembly. The wall is made of concrete (C25) and has a thickness of 200mm. The floor is made of concrete (C25) and has a thickness of 100mm. The wall is reinforced with 3F16 bars. The floor is reinforced with 3F16 bars. The connection is made using a 30mm diameter anchor bolt (SEHC) and a 30mm diameter stainless steel plate (SUS304). The drawing includes dimensions for the wall thickness (200mm), floor thickness (100mm), and the distance from the wall face to the center of the anchor bolt (30mm). The drawing also includes labels for the materials and components: 受枠LSM-32 (SUS304), ステンレス製グレーチングますぶた FBM30-3255 メインバーピッチp=30 (SUS304), アンカー (SEHC), and the concrete grades C25 and C20.

	受枠			SUS304		3.3	
	ステンレスますぶた			SUS304		12.8	
項番	名称			材質	個数	kg/個	記事
担当	製図	照査	承認	1 5 名称	DKC ステンレス製グレーチングますぶた		
	鈴木 (ち)	本木	伊藤		ノーマルタイプ 適用荷重：歩道用		
平成 年 月 日					尺度	FBM30-3255 (メインバーピッチ30mm)	
第一機材株式会社				三角 法	図 番	S-E3-07967	

記号	内容	日付	編集	担当	製図	照査	承認	1 5	名称
					鈴木 (ち)	本木	伊藤		
				平成 年 月 日				三角 法	図番
				第一機材株式会社					
親番									
図歴									