

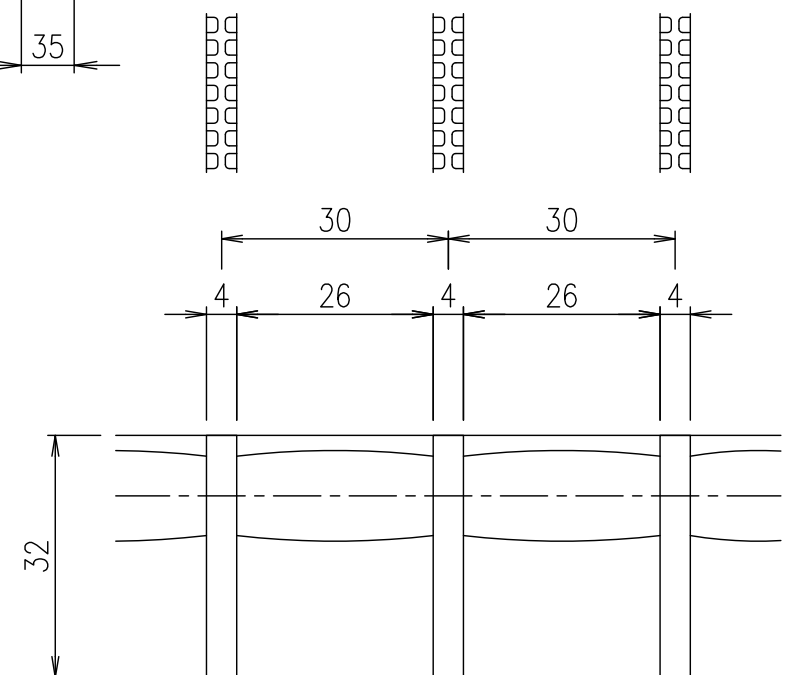
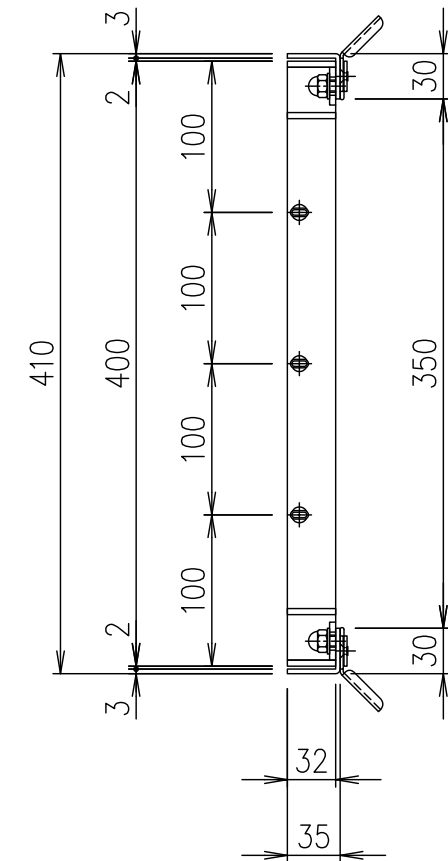


Figure 10 is a technical drawing of a staircase railing assembly. The drawing shows a side elevation of the railing system. Key components and dimensions include:

- Main Rail:** 受枠 LF30-32 (SUS304). Total width is 410mm. The mounting flange width is 400mm.
- Vertical Post:** アンカー (SEHC)@500. The diameter is 35mm.
- Support Bar:** ステンレス製グレーチングノンスリップタイプ (グリッパ) FGH30-3240 (SUS304). The main bar pitch is $p=30$ mm. The total width of the support bar assembly is 350mm. The mounting flange width is 32mm.
- Fasteners:**
 - 六角袋ナット・座金 M8 (Hexagonal Nut and Washer M8) securing the main rail to the post.
 - 固定ボルト M8x16 (Fixed Bolt M8x16) securing the support bar to the post.
- Dimensions:**
 - Horizontal dimensions: 410mm (total main rail width), 400mm (main rail flange width), 350mm (total support bar width), 32mm (support bar flange width), 21.5mm (distance from post center to inner edge of support bar), 8.5mm (distance from post center to outer edge of support bar), 30mm (gap from wall to railing).
 - Vertical dimensions: 35mm (post diameter), 32mm (support bar flange height).

記号	内容	日付	編集
親番			
図歴			

	受枠			SUS304		3.0	
	ステンレsgレート			SUS304		16.2	
項番	名称			材質	個数	kg/個	記事
担当	製図	照査	承認	1 5 名称	DKC ボルト固定式ステンレス製グレーチング		
	鈴木 (ち)	本木	伊藤		グリップタイプ 適用荷重：T-2 FGH30-3240 (メインバーピッチ30mm)		
平成 年 月 日				尺度			
第一機材株式会社				三角 法	図 番	S-E3-07763	