


GIB

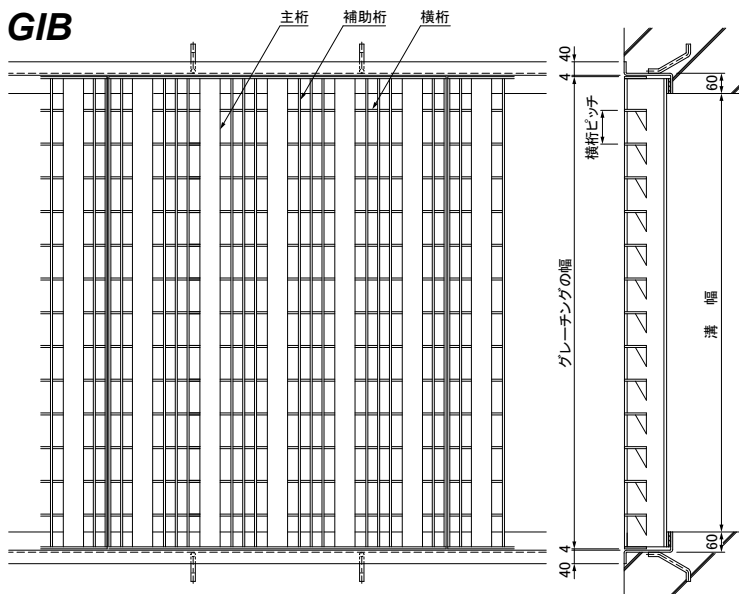


●特長

GIB型ヘビーグレーチングは、長支間(長スパン)用のみぞ蓋に使用するグレーチングです。ご使用の際は、**使用目的・みぞ幅・使用箇所の交通量・予想される最大荷重・使用箇所の略図**などをお知らせください。


●備考

- 1.グレーチングの選定基準・特長・仕様・材質などは 6-2～6-3ページ参照。
2.荷重区分は 6-4ページ参照。

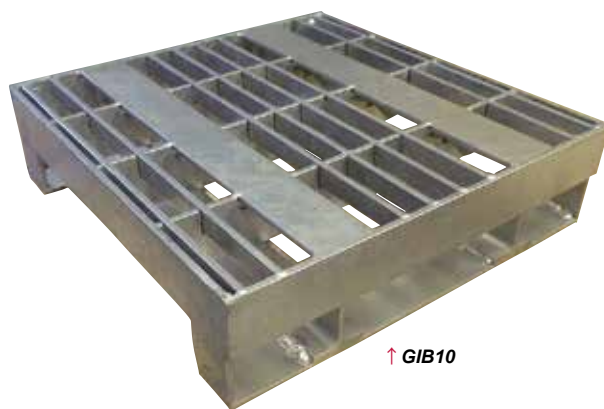


↑ **GIB10**

●受枠詳細図

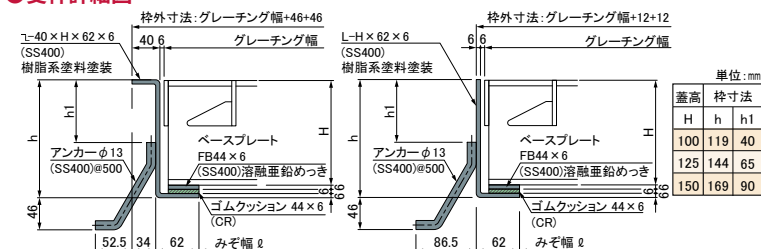

※L曲げ棒も製作可能です。

●主桁形状

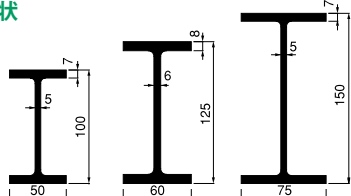

●寸法表

みぞ幅ℓ mm	グ レ ー ティング (本 体)							通し受枠(定尺2000mm)		適 用 荷 重			
	幅 mm	長さ mm	主 桁		横 桁		型 式	質 量 kg/枚	寸 法 mm	質 量 kg/m組	T-14	T-20	T-25
			高さmm	ピッチmm	高さmm	ピッチmm							
600	700	995	100	200	50	100	GIB10-6	69.2	└-40×119×62×6	19.2	●		
			125	200	50	100	GIB12-6	81.2	└-40×144×62×6	21.6		●	
			125	150	50	100	GIB12S-6	98.4	└-40×144×62×6	21.6			●
700	800	995	100	200	50	100	GIB10-7	79.3	└-40×119×62×6	19.2	●		
			125	200	50	100	GIB12-7	92.8	└-40×144×62×6	21.6		●	
			125	150	50	100	GIB12S-7	112.4	└-40×144×62×6	21.6			●
800	900	995	100	200	50	100	GIB10-8	89.2	└-40×119×62×6	19.2	●		
			125	200	50	100	GIB12-8	104.3	└-40×144×62×6	21.6		●	
			125	150	50	100	GIB12S-8	126.5	└-40×144×62×6	21.6			●
900	1000	995	125	200	50	100	GIB12-9	115.2	└-40×144×62×6	21.6	●	●	
			150	200	50	100	GIB15-9	119.3	└-40×169×62×6	23.9			●
1000	1100	995	125	200	50	100	GIB12-10	126.0	└-40×144×62×6	21.6	●		
			150	200	50	100	GIB15-10	130.4	└-40×169×62×6	23.9		●	
			150	150	50	100	GIB15S-10	160.8	└-40×169×62×6	23.9			●
1100	1200	995	125	200	50	100	GIB12-11	136.9	└-40×144×62×6	21.6	●		
			150	200	50	100	GIB15-11	141.6	└-40×169×62×6	23.9		●	
			150	150	50	100	GIB15S-11	175.4	└-40×169×62×6	23.9			●
1200	1300	995	125	200	50	100	GIB12-12	147.7	└-40×144×62×6	21.6	●		
			150	200	50	100	GIB15-12	152.9	└-40×169×62×6	23.9		●	
			150	150	50	100	GIB15S-12	190.0	└-40×169×62×6	23.9			●
1300	1400	995	125	200	50	100	GIB12-13	158.6	└-40×144×62×6	21.6	●		
			150	200	50	100	GIB15-13	164.1	└-40×169×62×6	23.9		●	
			150	150	50	100	GIB15S-13	204.6	└-40×169×62×6	23.9			●
1400	1500	995	125	200	50	100	GIB12-14	169.4	└-40×144×62×6	21.6	●		
			150	200	50	100	GIB15-14	175.3	└-40×169×62×6	23.9		●	
			150	150	50	100	GIB15S-14	219.2	└-40×169×62×6	23.9			●
1500	1600	995	125	200	50	100	GIB12-15	180.2	└-40×144×62×6	21.6	●		
			150	200	50	100	GIB15-15	186.6	└-40×169×62×6	23.9		●	
			150	150	50	100	GIB15S-15	234.0	└-40×169×62×6	23.9			●
1600	1700	995	125	200	50	100	GIB12-16	191.0	└-40×144×62×6	21.6	●		
			150	200	50	100	GIB15-16	203.8	└-40×169×62×6	23.9		●	
			150	150	50	100	GIB15S-16	248.5	└-40×169×62×6	23.9			●
1700	1800	995	125	200	50	100	GIB12-17	203.2	└-40×144×62×6	21.6	●		
			150	200	50	100	GIB15-17	209.1	└-40×169×62×6	23.9		●	
			150	150	50	100	GIB15S-17	262.8	└-40×169×62×6	23.9			●
1800	1900	995	125	200	50	100	GIB12-18	213.9	└-40×144×62×6	21.6	●		
			150	200	50	100	GIB15-18	220.2	└-40×169×62×6	23.9		●	
			150	150	50	100	GIB15S-18	277.4	└-40×169×62×6	23.9			●
1900	2000	995	125	200	50	100	GIB12-19	222.5	└-40×144×62×6	21.6	●		
			150	200	50	100	GIB15-19	231.5	└-40×169×62×6	23.9		●	
			150	150	50	100	GIB15S-19	292.0	└-40×169×62×6	23.9			●
2000	2100	995	125	200	50	100	GIB12-20	243.2	└-40×144×62×6	21.6	●		
			150	200	50	100	GIB15-20	252.0	└-40×169×62×6	23.9		●	
			150	150	50	100	GIB15S-20	307.0	└-40×169×62×6	23.9			●