


GMHAOM

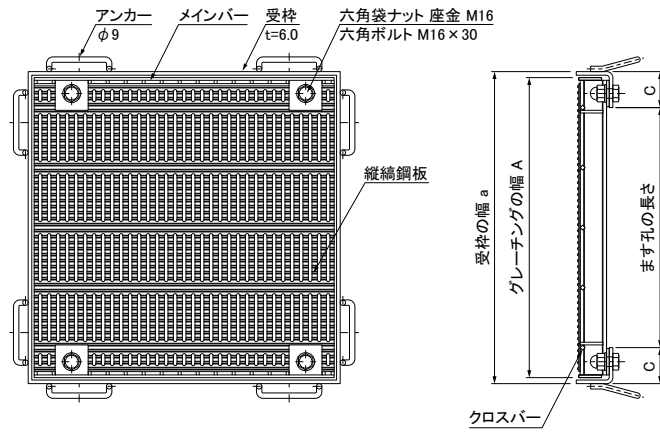

● 型式記号の説明 (● 寸法表の見方)

GMHAOM19- \*\* A


A: ゴム無

B: ゴム付

みぞ幅

グレーチング高さ

— グリップデザイン・ますぶたタイプ (ボルト固定式)

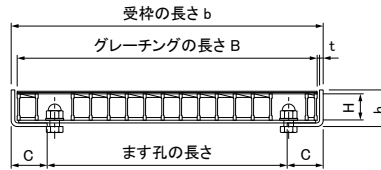

6

スチール製グリップライングレーチング

● 寸法表 (表内のtは受枠の厚みです)

ます穴の幅×長さ mm	ます蓋				四方受枠						適用荷重							
	A mm	H mm	型式	質量 kg/m	a mm	b mm	h mm	c mm	t mm	質量 kg/m組	歩道	T-2	T-6	T-14	T-20	T-25		
300×300	400	32	GMHAOM32-33A	10.4	420	420	48	60	6	18.2		●						
			GMHAOM32-33B	10.4	420	420	54	60	6	18.7		●						
		38	GMHAOM38-33A	11.2	420	420	54	60	6	19.5				●				
			GMHAOM38-33B	11.2	420	420	59	60	6	20.0				●				
		44	GMHAOM44-33A	12.9	420	420	61	60	6	21.8						●		
			GMHAOM44-33B	12.9	420	420	66	60	6	22.3						●		
50	GMHAOM50-33A	15.5	420	420	66	60	6	24.9								●		
	GMHAOM50-33B	15.5	420	420	71	60	6	25.2								●		
400×400	500	32	GMHAOM32-44A	16.0	520	520	48	60	6	25.7		●						
			GMHAOM32-44B	16.0	520	520	54	60	6	26.3		●						
		44	GMHAOM44-44A	19.1	520	520	61	60	6	30.2				●				
			GMHAOM44-44B	19.1	520	520	66	60	6	30.8				●				
		50	GMHAOM50-44A	23.9	520	520	66	60	6	35.6					●			
			GMHAOM50-44B	23.9	520	520	71	60	6	36.0					●			
55	GMHAOM55-44A	25.5	520	520	71	60	6	37.6								●		
	GMHAOM55-44B	25.5	520	520	76	60	6	38.3								●		
450×450	550	32	GMHAOM32-45A	18.5	570	570	48	60	6	29.2		●						
			GMHAOM32-45B	18.5	570	570	54	60	6	29.8		●						
		50	GMHAOM50-45A	26.7	570	570	66	60	6	39.5				●				
			GMHAOM50-45B	26.7	570	570	71	60	6	39.9				●				
		55	GMHAOM55-45A	29.8	570	570	71	60	6	43.0					●			
			GMHAOM55-45B	29.8	570	570	76	60	6	43.9					●			
60	GMHAOM60-45A	31.8	570	570	76	60	6	45.9							●			
60	GMHAOM60-45B	31.8	570	570	81	60	6	46.1							●			
500×500	600	38	GMHAOM38-55A	24.3	620	620	54	60	6	36.7		●						
			GMHAOM38-55B	24.3	620	620	59	60	6	37.4		●						
		50	GMHAOM50-55A	32.5	620	620	66	60	6	46.5				●				
			GMHAOM50-55B	32.5	620	620	71	60	6	47.0				●				
		55	GMHAOM55-55A	36.3	620	620	71	60	6	50.8					●			
			GMHAOM55-55B	36.3	620	620	76	60	6	51.8					●			
65	GMHAOM65-55A	40.8	620	620	81	60	6	56.5							●			
65	GMHAOM65-55B	40.8	620	620	86	60	6	57.9							●			